



**1.000 - 10.000 l/h**

**Typical applications**


Plating - Rinsing - Filtration

**Features**


- Immersion length series D90 270mm / D120 400mm
- Environmentally safe in-tank installation
- Free turning shaft - no seal
- Self priming - can run dry
- Full length motor shaft
- Outlet sockets available in PP, PVDF and CPVC

**Options**


- Suction extension pipe
- Hose connection

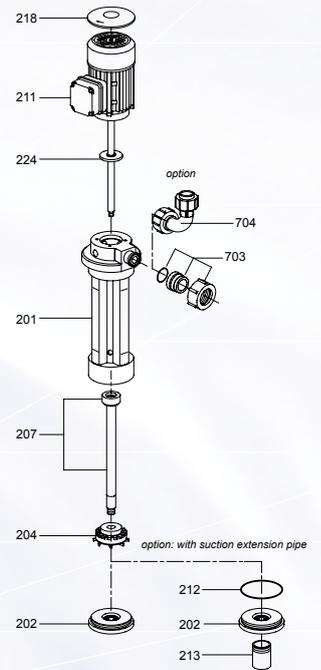

**Vertical pumps series D90 / D120 - PP/PVDF**

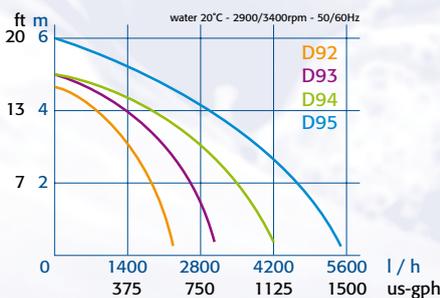

Type	Material	kW	HP	Out(d/DN)
D92	PP/PVDF	0,12	1/6	25/20
D93		0,18	1/4	
D94		0,25	1/3	
D95		0,37	1/2	

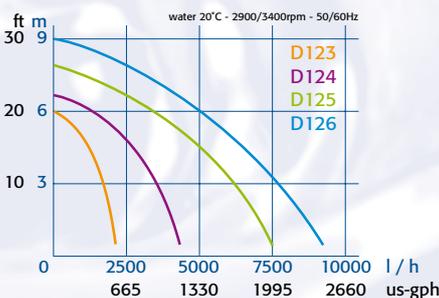

Type	Material	kW	HP	Out(d/DN)
D123	PP/PVDF	0,18	1/4	32/25
D124		0,25	1/3	
D125		0,37	1/2	
D126		0,55	3/4	

[www.hendor.com](http://www.hendor.com)

