



D172

7.000 - 35.000 l/h

Typical applications


- Plating - Rinsing - Filtration
- Waste treatment

Features


- Immersion length 400mm
- Environmentally safe in-tank installation
- Free turning shaft - no seal
- Self priming - can run dry
- Full length motor shaft
- Outlet sockets available in PP, PVDF and CPVC

Options

- Suction extension pipe
- Hose connection

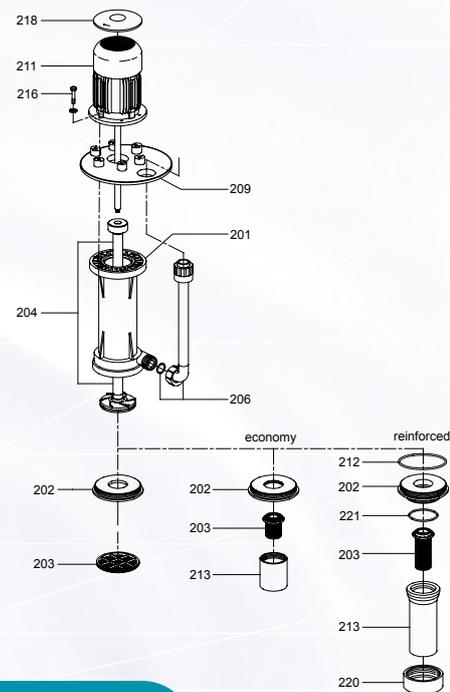

Vertical pumps series D170 - PP/PVDF

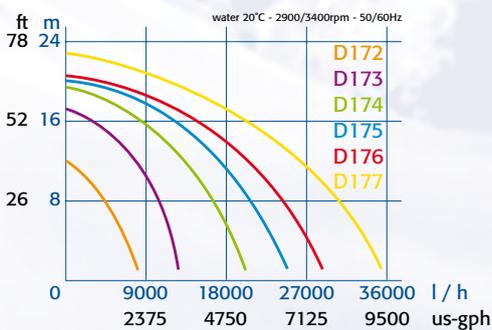

Type	Material	kW	HP	Out(d/DN)
D172	PP/PVDF	0,55	3/4	25/20
D173		0,75	1	32/25
D174		1,1	1-1/2	40/32
D175		1,5	2	
D176		2,2	3	
D177		3	4	

